


# Differential Lock Valve

DL14 (for 4 motors)

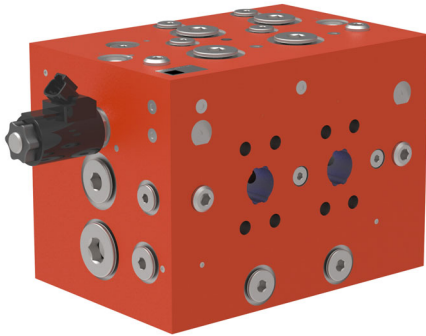

- Excellent traction at the lowest travel speeds
- Differential lock can be activated with low pressure (50 bar max.)
- Anti-shock and make-up valves can be incorporated to protect the system and prevent cavitation
- 4 bi-directional flow dividers (dividing and adding/combining)
- Minimal pressure losses when lock is active

## 1 Description

### 1.1 General

The DL14 differential lock valve is a further development of our current product, with a focus on energy optimization and extended flow control range.

This lock valve is intended for use in hydrostatic drives with parallel-connected hydraulic motors in either open- or closed-loop mode. When the lock valve is switched off, the hydraulic flow can divide itself among the hydraulic motors

in any required ratio, and with minimal pressure losses.

When the lock valve is switched on, the hydraulic motors are compelled to operate in parallel, and the lock valve supplies load-independent flows from its 4 outlet ports. This arrangement prevents the wheel from spinning in unfavorable ground conditions.


### 1.2 Application examples

- Agricultural equipment
- Construction equipment
- Forestry machines
- Municipal equipment


## 2 Symbols

### 2.1 Hydraulic actuation


without anti-shock and make-up valve

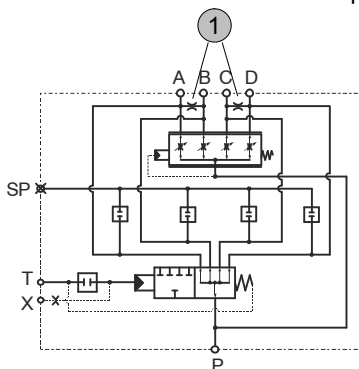

with make-up valve

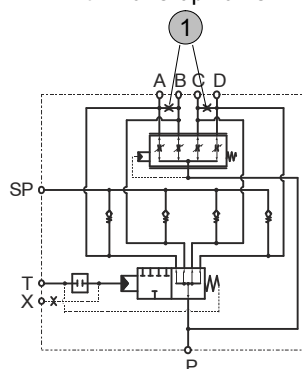


with anti-shock and make-up valve

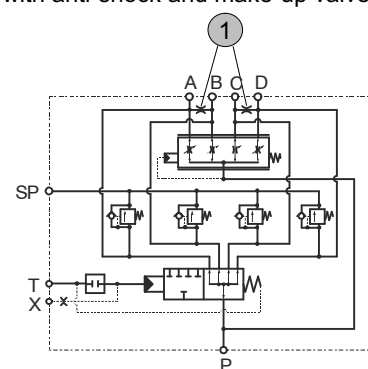


1 Balancing orifice can be fitted

## 2.2 Electrohydraulic actuation


without anti-shock and make-up valve

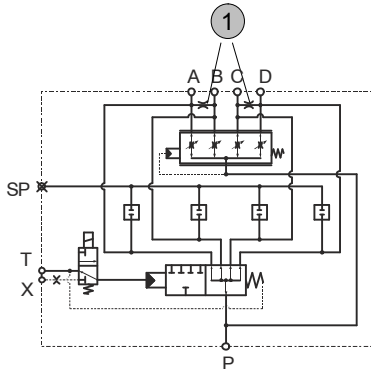

with make-up valve

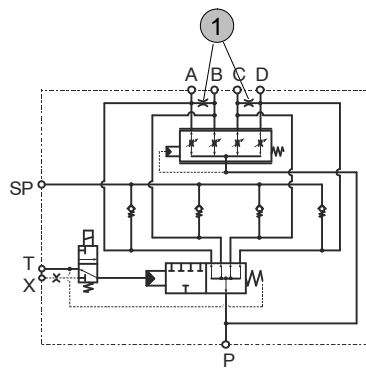

with anti-shock and make-up valve

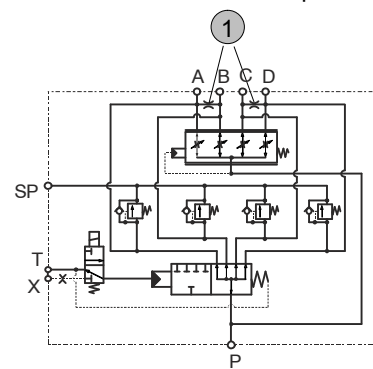

1 Balancing orifice can be fitted

## 3 Technical data

Hydraulic characteristics	Unit	Description, Value
Mounting attitude		Unrestricted; preferably horizontal
Nominal flow rate $Q_{max}$ (with connected valve)	l/min	300
Nominal flow rate per output	l/min	3 ... 75
Operating pressure $p_{max}$	bar	450
Peak pressure (max. 100000 duty cycles)	bar	520
Pilot pressure $p_p$ min.- $p_p$ max.	bar	10 ... 50
Viscosity range	mm <sup>2</sup> /s	10 ... 300
Max. admissible level of contamination of the hydraulic fluid		ISO 4406 code 20/18/15, achievable with a filter rating of $\beta_{10} \geq 75$
Fluid temperature range	°C	-20 ... +80
Fluids		HL/HLP mineral oils DIN 51524; other fluids consult Bucher Hydraulics
Connection types		SAE NG 25 M14x1,5
Electrical characteristics	Unit	Description, Value
Nominal voltage	V DC	12 or 24
Power consumption	W	27
Nitrile seals		NBR
Duty cycle		100 ED %
Ambient temperature	°C	max. +60
Coil temperature	°C	max. +180 (insulation class H)

Electrical characteristics	Unit	Description, Value
Enclosure protection (with properly mounted plug)		AMP Junior Timer (2-pole) IP65 Deutsch-plug, DT04-2P-EP04 IP67 (DIN EN 60529)
Electrical connection		AMP Junior Timer (2-pole) Deutsch-plug, DT04-2P-EP04


Surface protection of the DL14: black priming (RAL 9004).

## 4 Performance graphs

Measured with viscosity 35 mm<sup>2</sup>/s.


### 4.1 Pressure drop of 4-fold differential lock valve

#### 4.1.1 Pressure losses when dividing and adding

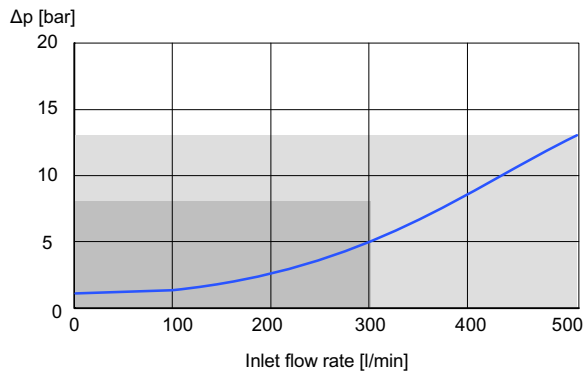


■ Nominal working range ■ Extended working range

#### 4.1.2 Pressure losses when switched off

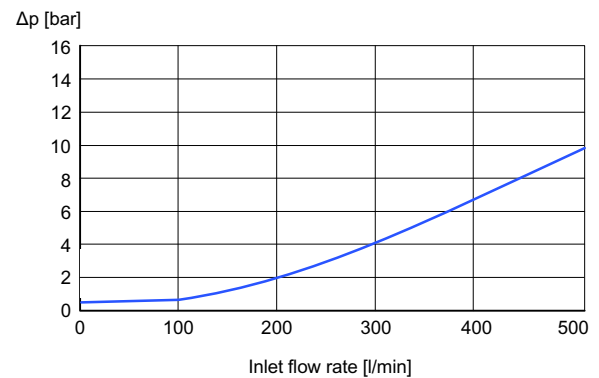

## 4.2 Division accuracy


### 4.2.1 Division accuracy up to maximum flow rate

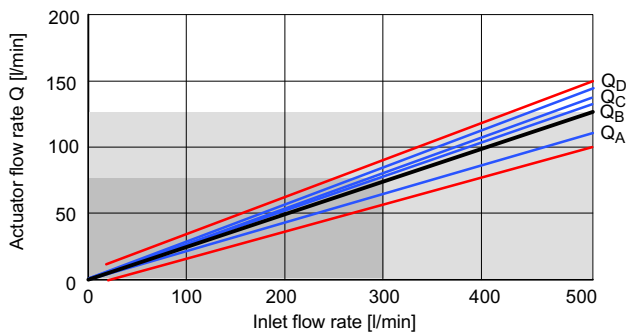

■ Nominal working range ■ Extended working range

— Limitation of division accuracy

## 5 Dimensions

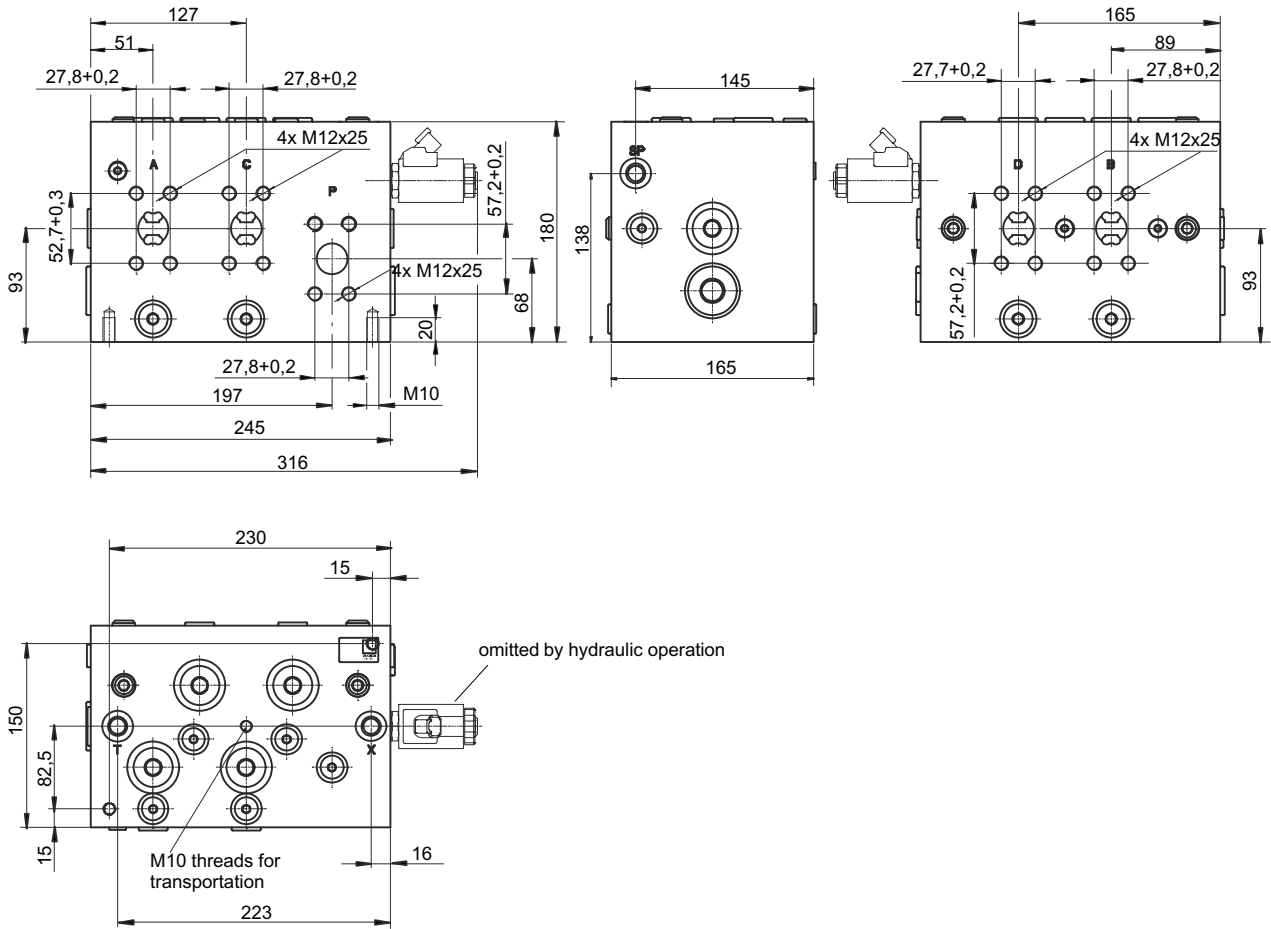



### 5.1 Connection sizes

Port	Port sizes
P, A, B, C, D	SAE NG 25
T, X, SP	M14 x 1,5

## 6 Versions

### 6.1 Plug bases

AMP Junior Timer J	DT04-2P-EP04 D
	

## 7 Ordering code

DL 14 - 25 25 25 25 - EH - 0 SAE J 12 - P = D1= 1)

Serie = DL

Size = 14

Division ratio [%]

	A	B	C	D
1:1:1:1	25	25	25	25

Type of actuation

hydraulic = \*H  
electrohydraulic = EH

Design no.: 0 - 9 (inserted by Bucher Hydraulics)

Port thread

SAE NG25 = SAE

Plug connector

AMP Junior Timer (2-pole) = J  
DT04-2P-EP04 = D

Coil voltage

DC 12V = 12  
DC 24V = 24

Options:

with secondary pressure limitation = P  
adjustable values [bar]: 160, 210,  
250, 300, 330, 350, 380, 400  
(specify the pressure setting in plain text)  
with anti-cavitation valve = N

1) Size of balancing orifices must be plainly stated (see also sect. 2)  $\varnothing 0.6 / 0.8 / 1.0$  e.g. if balancing orifice D1 is to be 0.8 mm, then D1 = 08

info.kl@bucherhydraulics.com

www.bucherhydraulics.com

© 2023 by Bucher Hydraulics GmbH, D-79771 Klettgau

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.

Classification: 430.310.335.310.